

NEMA

Model SSB0022D-C
MFG PN: TSSF56HC2U2B

Model SSB0022D-C

Product Data Package



MODEL	HP	RPM	VOLTAGE	PHASE	Hz	FRAME	MOUNT	ENCLOSURE
SSB0022D-C	2	3510	230/460	3	60	56HC	Rigid/C-Flange	TEFC

Toronto

TOLL FREE 1.888.286.1820
PHONE 905.829.1001
EMAIL info@techtopcanada.com

Montreal

TOLL FREE 1.844.354.5111
PHONE 514.354.1002
EMAIL infoQC@techtopcanada.com

Moncton

PHONE 506.386.5794
EMAIL infoNB@techtopcanada.com

Winnipeg

PHONE 204.633.2779
EMAIL infoMB@techtopcanada.com

Vancouver

PHONE 604.525.1551
EMAIL infoBC@techtopcanada.com



Index

Motor General Data Sheet	P 2
Nameplate Information	P 3
Technical Performance Data	P 4
Motor General Wiring Diagram	P 5
Motor General Outline Drawing	P 6

NEMA

Model SSB0022D-C
MFG PN: TSSF56HC2U2B



ELECTRICAL DATA		
Rated Motor Output Power	2	HP
	1.5	kW
Rated Motor Speed	3510	r/min 60Hz
	2880	r/min 50Hz
Rated Motor Voltage (+/-10%)	230/460	V/60Hz
	190/380	V/50Hz
Rated Motor Current	5.28/2.64	A (I _n) @ 60Hz
	6.28/3.14	A (I _n) @ 50Hz
Phase	3	Ø
Locked Rotor Current @ High Voltage	21.87	A (I _n) @ 60Hz
FI Current @ 208V	5.84	A (I _n) @ 60Hz
Service Factor	1.25	@ 60Hz
	1	@ 50Hz
KVA Code	L	60Hz
	H	50Hz
Nominal Efficiency	85.5	% @ 60Hz
Nominal Power Factor	0.83	cosΦ @ 60Hz
Leads (Qty, Size)	9	18
Connection	YY/Y	—
Coil Resistance	-	Ω
Start Capacitor	-	µF/V
Run Capacitor	-	µF/V
VFD DUTY (S.F. 1.0)	RATIO	Hz
Variable Torque	30:1	2 - 60
Constant Torque	15:1	4 - 60
FULL LOAD TEMPERATURE RISE		
Full Load Temperature Rise	40.7	°C @ 60Hz
	-	°C @ 50Hz

GENERAL DATA		
Frame Size	56HC	
Enclosure	TEFC	
Mounting	Rigid/C-Flange	
Approximate Weight (lbs.)	51.7 lbs.	
Casing Material / Fan Cover	Stainless Steel	Stainless Steel
Shaft Material	304 SS	
NEMA Design	B	
Degree of Protection (IP)	69K	
Insulation Class / Temp Rise (60Hz)	F	B
Tropicalization	YES	
Duty	Cont. / S1	
Conduit Box Location	F1	
Feet Removable / Double Drilled	NO	YES
Paintwork	unpainted	
	unpainted	
MECHANICAL DATA		
Bearing DE Side	6205 ZZ	
Bearing ODE Side	6204 ZZ	
Grease Type	Food grade Mobilgrease™ FM 222	
Compensation Ring (wavy washer)	NDE	
Moment of Inertia (lb-ft²)	-	
Sound Pressure @ 3 FT dBA	-	
SITE CONDITIONS		
Ambient Temperature (°C)	40	
Meters Above Sea Level (MASL)	1000	
HAZARDOUS LOCATIONS		
CSA Certified	A, B, C & D	
Temperature Code	-	-

Questions? Call 1.888.286.1820


NEMA

Model SSB0022D-C
MFG PN: TSSF56HC2U2B

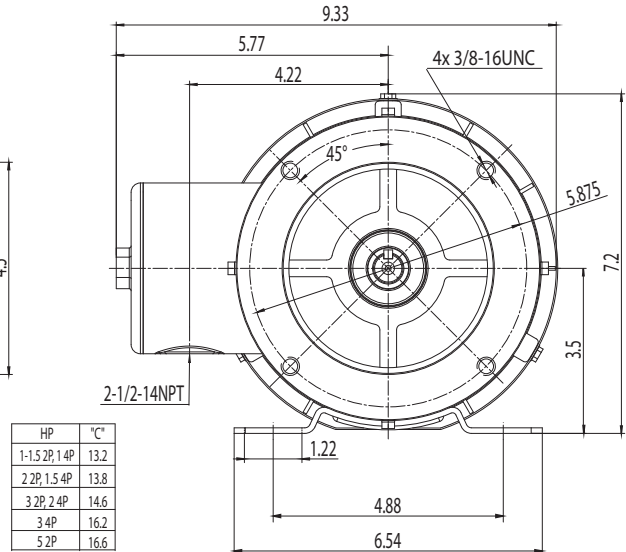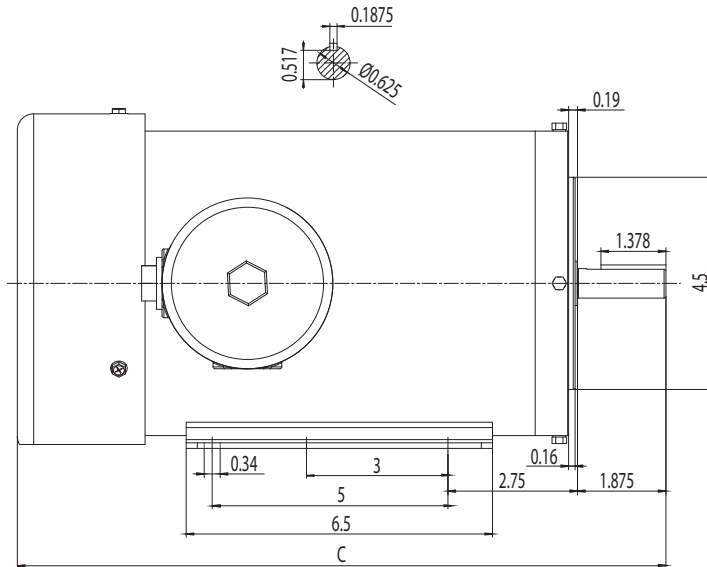

NAMEPLATE DATA	60Hz	50Hz
Horse Power	2	2
RPM	3510	2880
Voltage	230/460	190/380
Full Load Amps	5.28/2.64	6.28/3.14
Service Factor	1.25	1
KVA Code	L	H
Full Load Amps (208V)	5.84	-
Nominal Efficiency	85.5	83
Nominal Power Factor	0.83	0.87
Design	B	
Frame	56HC	
Enclosure Type	TEFC	
IP Rating	69K	
Duty	Cont. / S1	
Insulation Class	F	
Ambient Rating	40	
Drive End Bearing	6205 ZZ	
Opposite Drive End Bearing	6204 ZZ	
Weight (lbs)	51.7	

NAMEPLATE LAYOUT

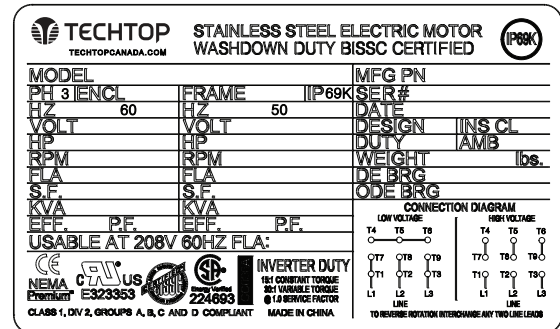

VFD DUTY (S.F. 1.0)	RATIO	Hz*
Variable Torque	30:1	2 - 60
Constant Torque	15:1	4 - 60

*For max speed please contact Techtop Canada


HAZARDOUS LOCATIONS	CSA COMPLIANT
Class / Division	Class I, Div. 2
Groups	A, B, C & D

Questions? Call 1.888.286.1820



Model SSB0022D-C
MFG PN: TSSF56HC2U2B

Torque Speed (T-n) Curve

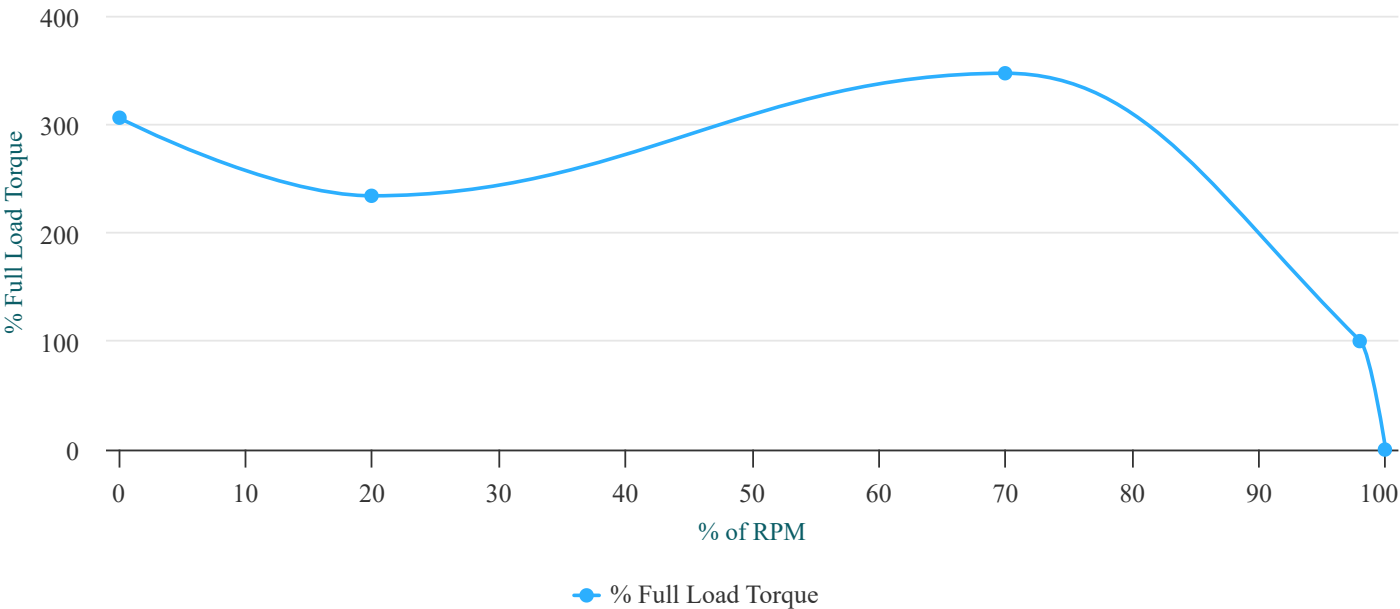

PERFORMANCE LOAD VALUES, HIGH VOLTAGE, 60Hz

TORQUE VALUES	TORQUE (lb-ft)	TORQUE (% FULL LOAD)	PERFORMANCE VALUES	
Locked Rotor Torque	9.2	306	Start Configuration	DOL
Pull-Up Torque	7	234	Starting Current (A)	21.87
Breakdown Torque	10.4	347	No-Load Current (A)	0.8
Full Load Torque	3	100	No-Load Power Factor	0.13



TYPICAL PERFORMANCE - NOT GUARANTEED VALUES

% OF RATED LOAD	25	50	75	100	125	S.F. 1.25
Line Amperes (A)	1	1.4	1.9	2.4	3	3
Efficiency (%)	79.4	86.2	87.7	87.4	86.3	86.3
Speed (r/min)	3574	3549	3523	3493	3461	3461
Power Factor (cosΦ)	0.58	0.78	0.86	0.9	0.91	0.91
Input Power (kW)	0.47	0.87	1.28	1.72	2.17	2.17


Questions? Call 1.888.286.1820



Model **SSB0022D-C**
MFG PN: TSSF56HC2U2B

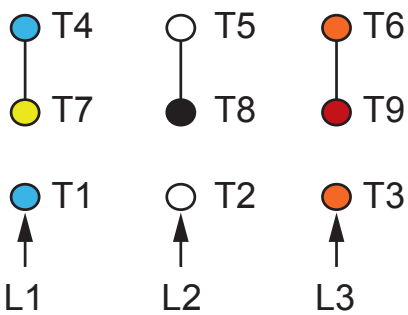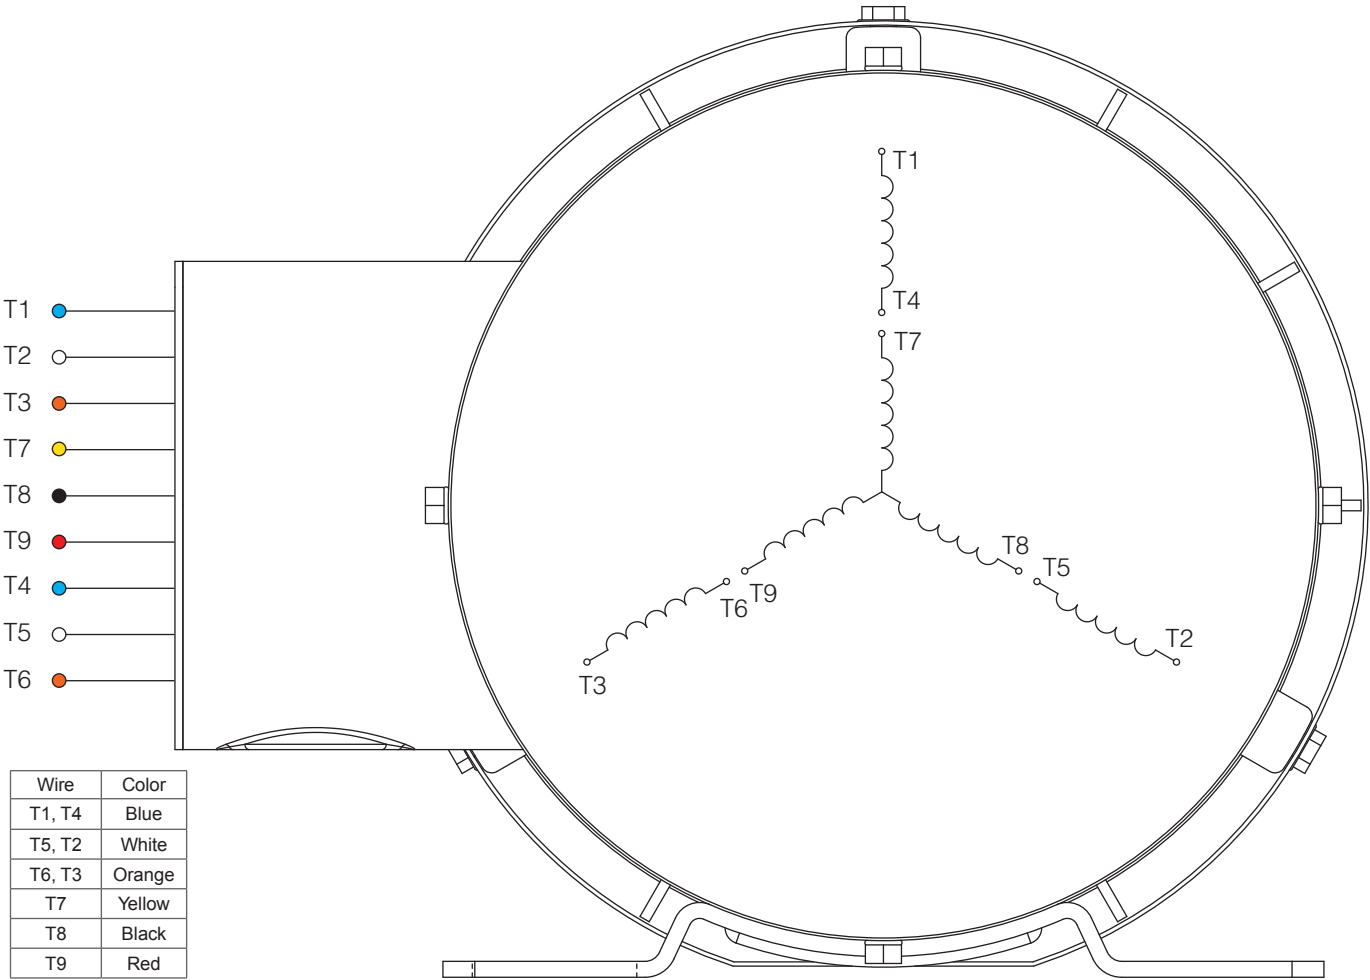

HIGH VOLTAGE
(Y)

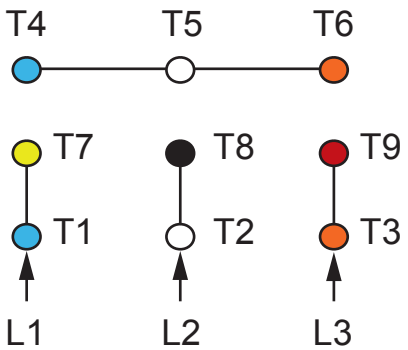

LOW VOLTAGE
(YY)


- NOTES:
- 1. CCW ROTATION FACING ODE FOR CONNECTIONS SHOWN
 - 2. TO REVERSE ROTATION, SWAP ANY TWO INPUT LINES
 - 3. WHEN MOTOR IS IN F1 POSITION, LEADS INDICATED WITH “*” EXIT THE CASING ABOVE THE CENTER LINE OF THE MOTOR, THE REMAINING LEADS EXIT BELOW THE CENTER LINE
 - 4. LEADS MUST BE NUMBERED AND COLORED AS SHOWN
 - 5. DIAGRAMS FOR REFERENCE ONLY




DRAWING NUMBER:	NEMA-3-9-YY-Y-SS
CONNECTION:	YY/Y
NUMBER OF LEADS:	9
THERMAL PROTECTION:	-

NEMA 3Ø YY/Y 9-Lead Dual Voltage

ISSUED DATE	24/02/25
STAINLESS STEEL IP69K MOTORS	

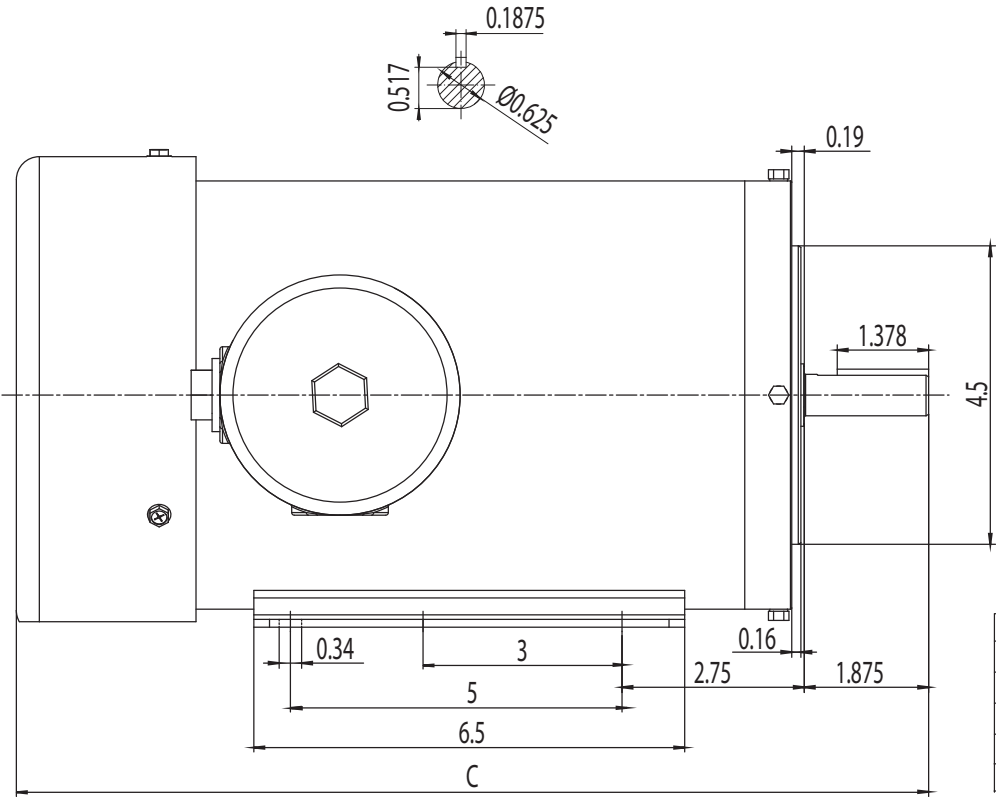

HP	"C"
1-1.5 2P, 1 4P	13.2
2 2P, 1.5 4P	13.8
3 2P, 2 4P	14.6
3 4P	16.2
5 2P	16.6

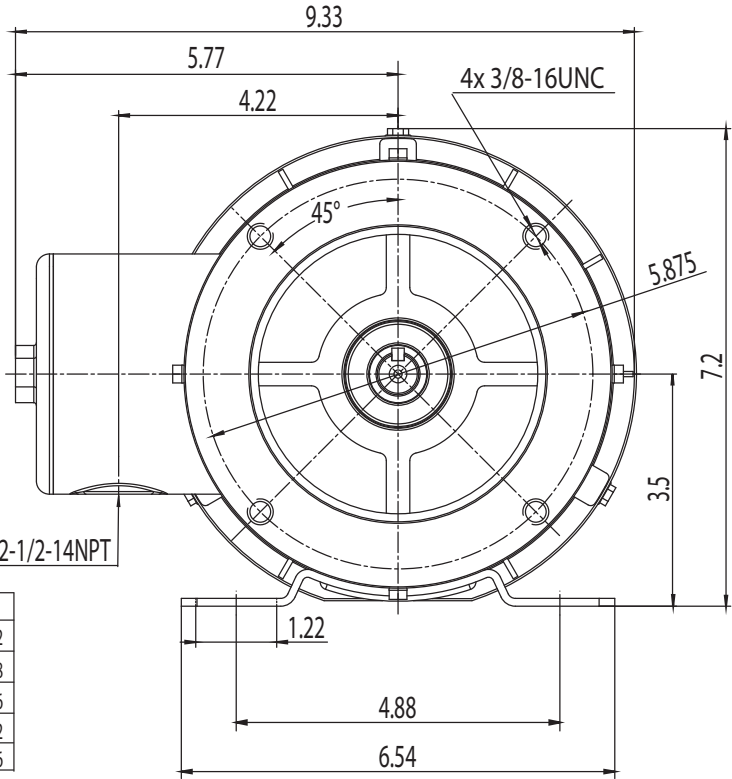

NEMA Premium TEFC 56HC

DRAWING NUMBER:

SS3-TF-56HC

DIMENSIONS:

Inches

MOUNTING:

Rigid/C-Flange

CASING MATERIAL:

Stainless Steel

ISSUED DATE

24/02/25

STAINLESS STEEL IP69K MOTORS